

Minichillers®

► with OLÉ controller, air- and water-cooled models

Minichillers are a cost-effective and environmentally-friendly cooling solution for many laboratory applications and routine tasks in research and industry. Due to the low purchase price, the investment pays off after just a few months. The OLÉ controller combines modern technology and easy operation with practice-orientated features including USB, RS232 and OLED display.

➔ **Down to -25 °C**
Working temperature

➔ **Up to 0,9 kW**
Cooling power


➔ **Up to 24 l/min**
Pump capacity

➔ **OLÉ controller**
OLED display

➔ Minichiller 600 OLÉ



➔ Minichiller 280 OLÉ

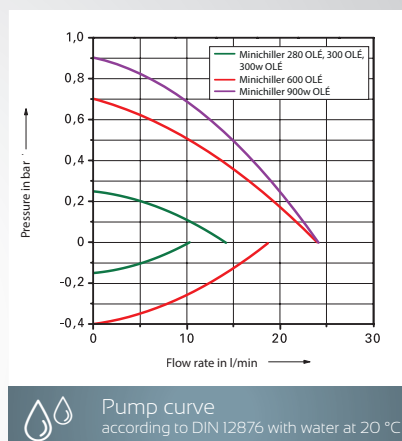

Model	Working temperature range (°C)	Pump Data				Cooling power (kW)				Dimensions W x D x H (mm)	Cat.No.	G
		max. pressure (l/min)	(bar)	max. suction (l/min)	(bar)	at (°C)						
						15	0	-10	-20			
Minichiller 280 OLÉ	-5...40	14	0,25	10,5	0,17	0,28	0,2	–	–	225 x 360 x 380	3065.0001.98	2
Minichiller 300 OLÉ	-20...40 (80)*	14	0,25	10,5	0,17	0,3	0,2	0,14	0,07	225 x 360 x 380	3006.0089.98	2
Minichiller 300w OLÉ	-20...40 (80)*	14	0,25	10,5	0,17	0,3	0,2	0,14	0,07	225 x 360 x 380	3006.0090.98	2
Minichiller 600 OLÉ	-20...40	24	0,7	18,0	0,4	0,6	0,5	0,35	0,15	280 x 490 x 424	3066.0002.98	2
Minichiller 600w OLÉ	-20...40	24	0,7	18,0	0,4	0,6	0,5	0,35	0,15	280 x 490 x 424	3066.0004.98	2
Minichiller 900w OLÉ	-25...40	24	0,9	18,0	0,4	0,9	0,7	0,4	0,2	280 x 490 x 424	3067.0001.98	2

* Permissible return temperature +80 °C

All models use natural refrigerant as standard

Options on request: heater

w = water-cooled