

Accessories



Windshield
stainless steel, for a stable flame under conditions of strong air flow
Art.-No. 8.000.600




Spray protector
for more safety when handling with pathogenic material of strong air flow
Art.-No. 6.000.200



Inoculation loops, wire Ø 0.6 mm
Special stainless steel
Ø 1 mm **Art.-No. 6.000.371**
Ø 3 mm **Art.-No. 6.000.373**
Ø 5 mm **Art.-No. 6.000.375**
Platinum / Iridium
Ø 1 mm **Art.-No. 6.000.381**
Ø 3 mm **Art.-No. 6.000.383**
Ø 5 mm **Art.-No. 6.000.385**



Inoculation loop holder
stainless steel, with sleeve nut, for inoculation loops with wire Ø 0.6 - 1 mm
Length 245 mm
Art.-No. 6.000.360
Length 215 mm
Art.-No. 6.000.365

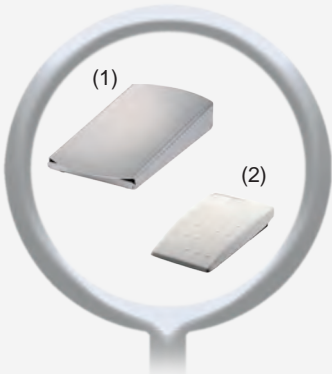

(1) Foot pedal
stainless steel, cable length 3.0 m
Art.-No. 6.000.402
(2) Foot pedal Mini
plastic, cable length 3.0 m
Art.-No. 6.000.403




Foot pedal radio set RF Stick
cable-free foot pedal operation, simply connect the RF-Stick and control the gas burner with wireless radio technology (available in EU countries only)
for all Fuego SCS and Gasprofi 1 SCS micro (as of Serial-No. 05...)
Art.-No. 8.000.404-RF



External IR - motion sensor
touch-free flame activation, stainless steel, cable length 0.4 m
Art.-No. 6.000.406



Tray, mobile
stainless steel, 5 places
Art.-No. 6.000.320

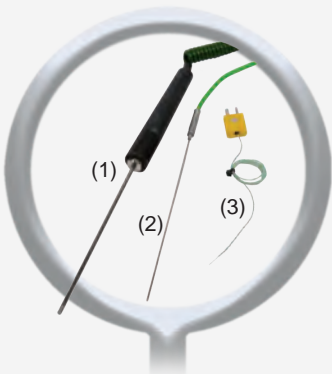

Thermocouple type K
(only Fuego SCS & Fuego SCS pro, as of Serial-No. 12Zxxxxx)
(1) Immersion sensor Ø 3 mm with handle, sensor length 130 mm, helix connection cable
Art.-No. 8.200.240
(2) Immersion sensor Ø 1.5 mm, sensor length 150 mm, bendable, cable length 2 m
Art.-No. 8.200.241
(3) Air sensor, PTFE insulated, cable length 1 m
Art.-No. 8.200.242



Measuring adapter
for thermocouples, type K, temperature range from +35°C to +350°C (only Fuego SCS & Fuego SCS pro, as of Serial-No. 12Zxxxxx)
Art.-No. 8.200.230



Tray for right, left or rear side
for Fuego SCS - Series
Art.-No. 8.000.340
for Gasprofi 1 SCS micro
Art.-No. 6.000.341



Burner head
stainless steel, double length for better heating of Erlenmeyer flasks, decomposable, dishwasher-proof and autoclavable
Art.-No. 8.100.091

Accessories




Safety adapter
with integrated pressure regulator
for gas cartridges **CV 360**
Art.-No. 8.000.700
for gas cartridges **Express 444**
Art.-No. 6.000.750



Safety adapter C 206
with integrated pressure regulator,
gas leak protection and DVGW-tubing
(0.5 m) for gas cartridges **C 206**
Art.-No. 6.000.800



Safety adapter CV
with integrated pressure regulator,
gas leak protection, DVGW-tubing
(0.5 m) and stainless steel stand
for gas cartridges
CV 470 Art.-No. 6.000.850
CV 300 Art.-No. 6.000.831

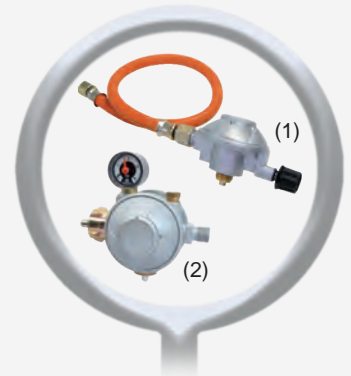

(1) Safety adapter R
with pressure regulator and DVGW-
tubing (0.5 m) for gas cylinders
R 901 / R 904 / R 907
Art.-No. 6.000.840


(2) DVGW low press. regulator
DIN 4811-4, for household liquid
gas installation, with overpress-
-, temperature- fuse & manometer,
for **gas bottles up to 14 kg**
Art.-No. 6.000.150



Safety adapter CP 250
with integrated pressure regulator
and DVGW-tubing (0.5 m) for
gas cartridges **CP 250**
Art.-No. 6.000.820



Safety adapter CG 1750
with integrated pressure regulator,
DVGW-tubing (0.5 m) and stainless
steel stand for gas cartridges with
7/16" x 28 UNEF-thread, e.g. **CG 1750**
Art.-No. 6.000.810

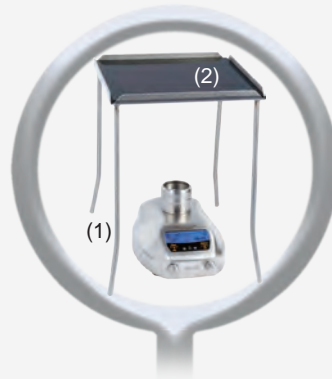

(1) Quadrupod
155 x 155 x 210 mm (L x W x H)
Art.-No. 6.000.930

(2) Ceran cover plate
155 x 155 mm (L x W)
Art.-No. 6.000.931



External charging station
for rechargeable batteries: Mignon
(AA), NiMH (Fuego SCS pro only)
Art.-No. 8.000.950




Gas cartridges Propane / Butane
with valve

- CV 360, 52g Art.-No. 6.000.180**
- CV 300, 240g Art.-No. 6.000.183**
- CV 470, 450g Art.-No. 6.000.185**
- CP 250, 250g Art.-No. 6.000.192**
- CG 1750, 170g Art.-No. 6.000.181**
- Express 444, 60g Art.-No. 6.000.182**

without valve

- C 206, 190g Art.-No. 6.000.190**

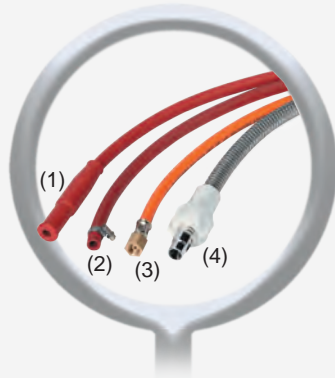

DVGW-Safety tubing
(1) for push-fit connection (0.5 m)
Art.-No. 6.000.102
(2) for push-fit connection, with 2
tubing clips (0.5 m)
Art.-No. 6.000.101
(3) for threaded connection (0.5 m)
Art.-No. 6.000.112
(4) for gas socket connection (0.5 m)
Art.-No. 6.000.122
other length on demand



Tubing deflector
for front side gas connection
Art.-No. 6.000.124



90° connection
for sidewise tubing connection
Art.-No. 6.000.123



Sales Department:
Spandauer Weg 1
D-37085 Göttingen
Phone: +49 (0)551 / 793789
Fax: +49 (0)551 / 793707

Production & Service:
Halle-Kasseler-Straße 49
D-37318 Arenshausen
Phone: +49 (0)36081 / 68940
Fax: +49 (0)36081 / 68942

Email: sales@wld-tec.com • Internet: http://www.wld-tec.com

(09/16) Specifications subject to change without notice